




DELTA SERIES LOUDSPEAKERS

SUBWOOFER SW-250

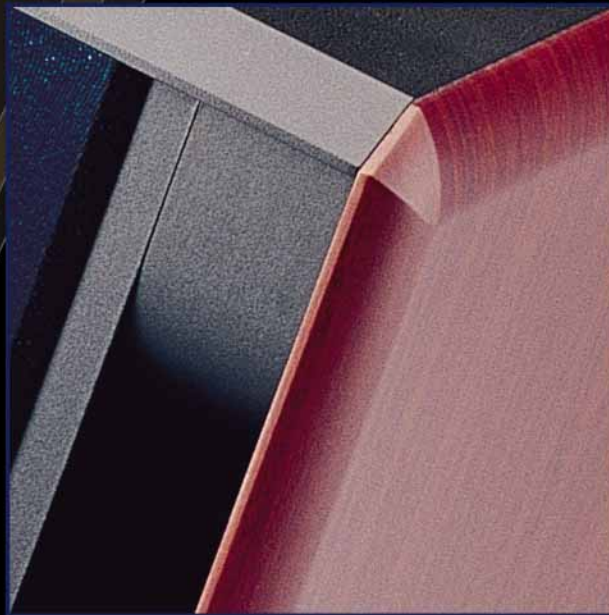

SUBWOOFER SPECIFICATIONS

SW-250 SUBWOOFER

Don't be afraid to turn it up and feel the thunder rolling through the room! By using dynamically shaped wooden port tubes with a band pass alignment we have greatly reduced "air rushes" (a common negative feature of subwoofers). The SW-250 produces great quality low frequencies for movies and superb definition for music. We have produced a new "Low End Drive" CE approved class A 250 watt amplifier that will run all day at high volume. The frequency response is 19~200Hz.

The amplifier has a low level subwoofer input and output, volume control, phase control from 0~180 degrees and a low pass frequency control from 40Hz~200Hz.

Model	Frequency Response	Power Watts RMS	Sensitivity 1w@1m	Rated Impedance	Bass/Mid Drivers (mm)	Tweeter (mm)	Dimensions H x W x D	Weight Kg's per speaker
SW 250	19~200 Hz	250	-	self powered	1 x 250	-	400 x 577 x 442	32.5 (110V-240V variable power supply)



The Subwoofer is available in Black woodgrain & Rosewood finish.



SW 250 Amplifier



ACCUSOUND AUSTRALIA PTY LTD
 Unit 3, 17-19 Marshall Rd, Kirrawee NSW 2232 Australia
 Email: info@accusound.com.au Website: www.accusound.com.au
 Phone: (02) 9545 3905 Fax: (02) 9545 3902